

2
0
2
1

TOP SELLERS

essential spare parts
to make daily work
easier

www.smcommerciale.it



nuova
SK
commerciale

Our brands:

A

ABM
ACC - COMPRESSORI
ADLER
AFINOX
AGA
AGIC
AGUSTONI
AKO
ALBA PUMPS
ALINOX
ALPENINOX
AMBACH
AMITEK
ANGELO PO
ARISTARCO
ASPES
ATA
AUREA OEM

B

BAKE OFF
BARON
BERTOS
BIGATTI
BLANCO
BORES
BRAHMA
BREMA
BRICE
BRITA
BURLODGE

C

CAMURRI
CAPLAIN
CAREL
CARPIGIANI
CASTA
CASTEL
CB
CDC
CIMBALI
COLDLINE
COMENDA
CONVOTHERM
COOL HEAD EUROPE
COPREL
COSMETAL
COSTAN

COVEN

CUPPONE

D

DANFOSS
DESCO
DESMON
DEXION
DIHR
DITO SAMA
DIXELL
DSF

E

EBM
EGO
ELETTROBAR
ELFRAMO
ELIWELL
ELOMA
EMAINOX
EMBRACO ASPERA
EMI

EMMEPI
EMMEVI

ENOFRIGO
ERRE 2

ETATRON
EUREMA

EURFRIGOR
EVCO

EVEREST
EVERLASTING

F

FABAR
FAEMA
FAGOR
FAMA
FB FAB
FERMOD
FIBER
FIMAR
FINDER
FIOCCHETTI
FIR
FOINOX
FORCAR
FORNITALIA
FRAMEC
FRI FRI

FRIGOR BOX

FRIGOVELL

FRIUL CO

FRIULINOX

G

GAM
GARBIN
GARLAND
GBG
GELMATIC
GERMAC
GERMANI
GICAR
GICO
GIERRE
GIGA
GIORIK
GRANDIMPIANTI
GRANULDISK
GRE
GRILLVAPOR

H

HEMERSON
HOBART
HONEYWELL
HOONVED
HORECATECH
HUDSON

I

IARP
IBERNA
ICEMATIC
IFI
IGF
ILSA
IME OMNIWASH
IMESA
IMPERIA
INFRICO
INJECTA
INOXBIM
INOXMACEL
INOXTREND
INTERTECNICA
IPSO
IRF
IRINOX
ISA

ITALFORNI

ITALIANPACK

ITV

J

JEMI
JOHN GUEST
JOHNSON CONTROLS
JUMO

K

KAREL
KASTEL
KITCHENAID
KLARCO
KLEMOR
KLIMAITALIA
KLUBER
KRUPPS

L

LA MINERVA
LAE
LAFERT
LAINOX
LAMBER
LASA
LGB
LOTUS
L'UNITE' HERMETIQUE
LUXIA

M

MACH
MARENO
MBM
MEIKO
METALCARRELLI
MIGEL
MILANTOAST
MISA
MODULAR
MODULINE
MONDIAL
MONOLITH
MORETTI FORNI
MTH
N
NILMA
NOAW
NTF
NUOVA SIMONELLI

Our brands:

O	SKF
OEM	SMEG
OFFCAR	SOCOLMATIC
OLIS	SOGECO
OLYMPIA	SPM
OMAS	STAFF ICE
ORVED	STAR 10
P	STUDIO 54
PEDROLLO	T
PEL	TECFRIGO
PIZZA GROUP	TECNODOM
POLARIS	T
POLIDORO	TECFRIGO
POLLINI	TECNODOM
PRIMAX	TECNOINOX
PRIMUS	TECUMSEH
PRIOLINOX	TEIKOS
PROJECT SYSTEM	TORNATI
R	U
RANCILIO	UGOLINI
RANCO	UNIFRIGOR
RATIONAL	UNIVERBAR
RDF	UNIVERSO
REFCO	UNOX
RICA	V
RIEBER	VALKO
RINALDI SUPERFORNI	W
ROBERTSHAW	WALO
ROBOT COUPE	WIGAM
ROLLERGRILL	WINTERHALTER
RONDA	Z
ROSINOX	ZANOLLI
S	ZANOTTI
SAB	ZANUSSI-ELECTROLUX
SABAF	ZIEHL
SAMMIC	
SCOTSMAN	
SECOP	
SEKO	
SIGMA	
SILANOS	
SILC	
SILKO	
SIMAG	
SINCOLD	
SIRAI	
SIRMAN	
SIT	

Index

Cooking

Lightings	1
Pilot burners	2
Candles	5
Lighting Cables	6
Flame Control Boards	7
Switches	9
Switches – Diverters - Buttons	10
Pilot Lamps	11
Electric Plates	12
Handles	13
Tangential Motor Fans	14
Energy Regulators	15
Heating Elements	16
Water Valves	17
Gas Valves	18
Timers	19
Thermocouples	20
Thermometers	21
Thermostats	22
Gas Pipes	23
Gas Valves and Accessories	24

Refrigeration

Hinges	37
Compressors	38
Air Capacitors	44
Filters	45
Grids	46
Handles	47
Axial Motor Fans	48
Pentavalent Motor Fans	49
Tangential Motor Fans	50
Digital Thermoregulators	51
Thermostatic Valves	52

Washing Equipment

Water Softener	25
Dishwasher Baskets	26
Dosers	27
Electric Pumps	28
Switches – Diverters – Buttons	29
Pilot Lamps	30
Shower Groups and Valves	31
Load Pipes	35
Drain Pipes	36

The data and images present may be subject to changement without notice and Nuova SM Commerciale SRL assumes no responsibility for possible errors contained or deriving from the use of them.

This publication is exclusive property of Nuova Sm Commerciale .
Therefore, its reproduction and disclosure is prohibited unless expressly authorized by Nuova SM Commerciale SRL.

Cooking / Lightings



3492

PIEZO LIGHTING

FASTON 6,35 X 0,8 MM.

Product : **Sit Controls**



3493

**PIEZO LIGHTING
WITH MASK**

COMPLETE WITH MASK
MINISIT VALVE
FASTON 6,35 X 0,8 MM.

Product : **Sit Controls**



3494

**PIEZO LIGHTING WITH
EUROSIT MASK**

FASTON 2,4 MM.

Product : **Sit Controls**



3406

PIEZO LIGHTING Ø 18 MM.

FASTON Ø 2,4 MM.
HOLE TEMPLATE d. 18 MM.

Product : **Sit Controls**



3402

**PIEZO LIGHTING VERNITRON 2
Ø 21 MM.**

FASTON Ø 2,4 MM.
HOLE TEMPLATE d. 21 MM.

Product : **Sit Controls**



3403

PIEZO LIGHTING VERNITRON 3

FASTON Ø 2,4 MM.

Product : **Sit Controls**

Cooking / Pilot Burners



968

PILOT BURNER

MODEL SIT CONTROLS MOD. 140

Product : **Sit Controls**



970

PILOT BURNER

FOR KITCHEN SERIES N700 - N900

Product : **Sit Controls**



980

PILOT BURNER

Product : **Sit Controls**



1101

**PILOT BURNER 1 FLAME
S/SIMPLE**

MODEL SIT CONTROLS MOD. 100
MULTIGAS WITH NOZZLE Ø 0,20 MM.

Product : **Sit Controls**



998

PILOT BURNER 1 FLAME

MODEL SIT CONTROLS MOD. 140
WITH FITTING FOR OVEN
THERMOCOUPLE SERIES 700/900

Product : **Sit Controls**



1100

PILOT BURNER 1 FLAME

MULTIGAS WITH NOZZLE Ø 0,35 MM.
FOR NEW SERIES 700 OMNIA

Product : **Sit Controls**



1118

PILOT BURNER 1 FLAME

MODEL SIT CONTROLS MOD. 100
MULTIGAS WITH NOZZLE Ø 0,20 MM.
WITH FITTING FOR PIPE Ø 6 MM.

Product : **Sit Controls**



1135

PILOT BURNER 1 FLAME

MODEL SIT CONTROLS MOD. 100
MULTIGAS WITH NOZZLE Ø 0,20 MM.

Product : **Sit Controls**



1292

PILOT BURNER 1 FLAME

MODEL SIT CONTROLS MOD. 160
WITH FITTING FOR THERMOCOUPLE

Product : **Sit Controls**



1132

PILOT BURNER 1 FLAME MOD.150

MODEL SIT CONTROLS MOD. 150
LOW DEFLECTOR
WITH FITTING FOR THERMOCOUPLE

Product : **Sit Controls**



1120

PILOT BURNER 1 FLAME MOD.150 LOW DEFLECTOR

MODEL SIT CONTROL MOD. 150
LOW DEFLECTOR
WITHOUT NOZZLE AND FITTINGS

Product : **Sit Controls**



991

PILOT BURNER 2 FLAMES MOD. 140 TARGET

MODEL SIT CONTROLS MOD. 140
LOW DEFLECTOR
WITH FITTING FOR THERMOCOUPLE

Product : **Sit Controls**



1108

PILOT BURNER 2 FLAMES MOD. 160 HORIZONTAL

MODEL SIT CONTROLS MOD. 160
HORIZONTAL MODEL
WITH FITTING FOR THERMOCOUPLE

Product : **Sit Controls**



1106

PILOT BURNER 2 FLAMES MOD. 160 VERTICAL

MODEL SIT CONTROLS MOD. 160
VERTICAL MODEL
WITH FITTING FOR THERMOCOUPLE

Product : **Sit Controls**



ST59

PILOT BURNER 2 FLAMES MOD.160

Product : **Sit Controls**



1114

PILOT BURNER 2 FLAMES MOD.160 HORIZONTAL RH

MODEL SIT CONTROLS MOD. 160
HORIZONTAL MODEL RH
WITH FITTING FOR THERMOCOUPLE

Product : **Sit Controls**



1115

PILOT BURNER 2 FLAMES MOD.160 HORIZONTAL LH

MODEL SIT CONTROLS MOD. 160
HORIZONTAL MODEL LH
WITH FITTING FOR THERMOCOUPLE

Product : **Sit Controls**



1102

PILOT BURNER 2 FLAMES S/SIMPLE

MODEL SIT CONTROLS MOD. 100
MULTIGAS WITH NOZZLE Ø 0,20 MM.

Product : **Sit Controls**

Cooking / Pilot Burners



1097

PILOT BURNER 3 FLAMES

Product : **Sit Controls**



1134

PILOT BURNER 3 FLAMES

MODEL SIT CONTROLS MOD. 100
WITH METHANE NOZZLE Ø 0,35 MM.

Product : **Sit Controls**



1138

PILOT BURNER 3 FLAMES

SIT CONTROLS MOD. 160
HORIZONTAL S/S MODEL WITH FITTING
FOR THERMOCOUPLE

Product : **Sit Controls**



ST11

PILOT BURNER 3 FLAMES

Product : **Sit Controls**



1104

**PILOT BURNER 3 FLAMES
S/DOUBLE**

MODEL SIT CONTROLS MOD. 100
MULTIGAS WITH NOZZLE Ø 0,20 MM.

Product : **Sit Controls**



1104M

**PILOT BURNER 3 FLAMES
S/DOUBLE METHANE**

MODEL SIT CONTROLS MOD. 100
MULTIGAS WITH METHANE NOZZLE
Ø 0,35 MM.

Product : **Sit Controls**



1107

**PILOT BURNER 3 FLAMES
MOD. 160 VERTICAL**

MODEL SIT CONTROLS MOD.160
VERTICAL MODEL WITH FITTING
FOR THERMOCOUPLE

Product : **Sit Controls**



1116

**PILOT BURNER 3 FLAMES
MOD.160 HORIZONTAL**

MODEL SIT CONTROLS MOD.160
HORIZONTAL MODEL WITH FITTING
FOR THERMOCOUPLE

Product : **Sit Controls**



1103

**PILOT BURNER 3 FLAMES
S/SIMPLE**

MODEL SIT CONTROLS MOD.100
MULTIGAS WITH NOZZLE

Product : **Sit Controls**

Cooking / Candles



1171

ROUND CANDLE M4 X MOD.140 TARGET

FOR PILOT MOD.140-150-160
MALE FASTON d. 4X1 MM.
CERAMIC DIMENSION 7 X 45 MM.



1170

ROUND CANDLE 4X1

FOR MULTIGAS PILOT MALE FASTON
d. 4X1 MM. CERAMIC DIMENSION
d. 7 X 45 MM.



1199

ROUND CANDLE

CERAMIC DIMENSION d. 7 X 45 MM.
FOR PILOT. 140-150-160



11004

ROUND CANDLE

FOR LIGHTING
MALE FASTON d. 4 X 1 MM.



1164

ROUND CANDLE

CERAMIC DIMENSION d. 7 X 45 MM.
FOR MULTIGAS PILOT



1191

CANDLE WITH CABLE 950MM.

CERAMIC DIMENSION d. 7 X 55 MM.
CABLE LENGTH 950 MM.
FOR SERIES 700



1169

SQUARED CANDLE MULTIGAS 4X1

FOR MULTIGAS PILOT
MALE FASTON d. 4X1 MM.
CERAMIC DIMENSION 7 X 6 X H70
MM.



1172

SQUARED CANDLE M 2,4

FOR MULTIGAS MALE PILOT
MALE FASTON d. 2,4 MM.
CERAMIC DIMENSION 7 X 6 X H59
MM.



1193

CANDLE WITH SPRING

CERAMIC DIMENSION d. 7 X 51 MM.
FOR SERIES 600-700

Cooking / Lighting Cables



3455

LIGHTING CABLE CM.100

LIGHTING FASTON Ø 2,4 MM.
FASTON CANDLE Ø 4 MM.

Product : **Sit Controls**



3454

LIGHTING CABLE CM.60

LIGHTING FASTON Ø 2,4 MM.
FASTON CANDLE Ø 4 MM.

Product : **Sit Controls**



3456

LIGHTING CABLE SIT CM.25

LIGHTING FASTON Ø 2,4 MM.
FASTON CANDLE Ø 4 MM.

Product : **Sit Controls**



3453

LIGHTING CABLE CM.100

LIGHTING FASTON d. 2,4 MM.
CANDLE FASTON d. 2,4 MM.

Product : **Sit Controls**



3452

LIGHTING CABLE CM.60

LIGHTING FASTON d. 2,4 MM.
CANDLE FASTON d. 2,4 MM.

Product : **Sit Controls**



3460

**HIGH TEMPERATURE
CABLE SECTION Ø 1 MM**

GLASS FILTER MAX 180°C
SALE ON LINEAR METER

Product : **Sit Controls**



3461

**HIGH TEMPERATURE CABLE
SECTION Ø 1,5 MM.**

GLASS FILTER MAX 180°C
SALE ON LINEAR METER

Product : **Sit Controls**



3462

**HIGH TEMPERATURE CABLE
SECTION Ø 2,5 MM.**

GLASS FILTER MAX 180°C
SALE ON LINEAR METER

Product : **Sit Controls**



3463

**HIGH TEMPERATURE CABLE
SECTION Ø 4 MM.**

GLASS FILTER MAX 180°C
SALE ON LINEAR METER

Product : **Sit Controls**

Cooking / Flame Control Electronic Boxes



3485

FLAME CONTROL SIT 0503004

SIT CONTROLS MODEL 0503004
POWER SOURCE 220/240V 50/60HZ
FOR CONVECTION OVENS

Product : **Sit Controls**

3441

FLAME CONTROL SIT 0537001

SIT CONTROLS MODEL 0537001
REPLACES CODE 0507001 POWER
SOURCE 220/240V 50/60HZ FOR
CONVECTION OVENS
Product : **Sit Controls**

3484

FLAME CONTROL SIT 0537307

SIT CONTROLS MODEL 0537307
POWER SOURCE 220/240V 50/60HZ
FOR CONVECTION OVENS
Product : **Sit Controls**



3448

FLAME CONTROL SIT 0577307

SIT CONTROLS MODEL 0577307
POWER SOURCE 220/240V. 50/60HZ
FOR CONVECTION OVENS

Product : **Sit Controls**

13401

FLAME CONTROL SIT 0579414

POWER SOURCE 220/240V.
50/60HZ FOR CONVECTION OVENS

Product : **Sit Controls**

13405

FLAME CONTROL SIT 0579805

Product : **Sit Controls**



3443

FLAME CONTROL BRAHMA CE11

MODEL BRAHMA 20653005 POWER
SOURCE 220/240V. 50/60HZ
FOR CONVECTION OVENS

Product : **Brahma**

3444

FLAME CONTROL BRAHMA CM11F

MODEL BRAHMA 37100204
POWER SOURCE 220/240V. 50/60HZ
FOR CONVECTION OVENS

Product : **Brahma**

3445

FLAME CONTROL BRAHMA CM11

MODEL BRAHMA 20080005
POWER SOURCE 220/240V. 50/60HZ
FOR CONVECTION OVENS

Product : **Brahma**

Cooking / Flame Control Electronic Boxes



13404

FLAME CONTROL HONEYWELL S4560 B1006

POWER SOURCE 220/240V. 50/60 HZ
FOR CONVECTION OVEN CM101
FOR GAS POT 45-100-122 / 45-100-135

Product : **Honeywell**



3430

FLAME CONTROL HONEYWELL S4565C 1033-1

HONEYWELL MODEL S4565C1033-1
POWER SOURCE 220/240V 50/60 HZ
FOR CONVECTION OVENS

Product : **Honeywell**



3436

FLAME CONTROL HONEYWELL S4560 A1008

HONEYWELL MODEL S4560 A1008
POWER SOURCE 220/240V 50/60 HZ
FOR PIZZA OVENS

Product : **Honeywell**



3437

FLAME CONTROL HONEYWELL S4560 M1010

HONEYWELL MODEL S4560 M1010
POWER SOURCE 220/240V 50/60 HZ
FOR CONVECTION OVENS

Product : **Honeywell**



3439

FLAME CONTROL HONEYWELL S4565A 2092-1

HONEYWELL MODEL S4565A 2092-1
POWER SOURCE 220/240V 50/60 HZ
FOR CONVECTION OVENS

Product : **Honeywell**



3267

SWITCH ON-OFF
EGO 49.21015.300

CONTACT WITH CAPACITY 16A 250V.
HALF-MOON PIN Ø 6 X 4,6 MM.
WITH BACK CONNECTION
FOR THERMOSTAT

Product : **Ego**



3254

SWITCH 0-1-2-3 POSITION

CONTACTS WITH CAPACITY
16A 250V. HALF-MOON
PIN Ø 6 X 4,6 MM.

Product : **Ego**



3251

SWITCH ON-OFF
EGO 49.21015.600

CONTACT WITH CAPACITY 16A 250V.
HALF-MOON PIN Ø 6 X 4,6 MM.
WITH BACK CONNECTION
FOR THERMOSTAT

Product : **Ego**



13842

SWITCH 0-1 POSITION
EGO 49.22015.700

CONTACTS WITH CAPACITY 16° 250V.

Product : **Ego**



3268

SWITCH 0-6 POSITION
EGO 43.27232.000

CONTACTS WITH CAPACITY 32° 250V
WITH HALF-MOON PIN Ø 6 X 4,6 MM.

Product : **Ego**

Cooking / Switches – Diverters - Buttons



3901

**BIPOLAR RED SWITCH
30x22MM.**

WITH RED PILOT LAMP 230V
DRILLING TEMPLATE 30 X 22 MM.



3902

**BIPOLAR ORANGE SWITCH
30x22 MM.**

WITH ORANGE PILOT LAMP 230V
DRILLING TEMPLATE 30 X 22 MM.



3897

**BIPOLAR RED DIVERTER
30x22 MM. W/PROTECTION**



3898

**BIPOLAR GREEN DIVERTER 30x22
MM W/PROTECTION**

WITH GREEN PILOT LAMP 230V
WITH BUTTON PROTECTION
DRILLING TEMPLATE 30 X 22 MM.



3893

**BIPOLAR GREEN SWITCH
30x22 MM.**

WITH GREEN PILOT LAMP 230V
CONTACTS NORMALLY OPENED
WITH BUTTON PROTECTION
DRILLING TEMPLATE 30 X 22 MM.



3900

BIPOLAR RED SWITCH

WITH RED PILOT LAMP 230V
CONTACTS NORMALLY CLOSED
WITH BUTTON PROTECTION DRILLING
TEMPLATE 30 X 22 MM.



3890

**BIPOLAR RED SWITCH
Ø 24MM.**

WITH RED PILOT LAMP 230V.
DRILLING TEMPLATE d. 24 MM.



3891

**BIPOLAR ORANGE SWITCH
Ø 24MM.**

WITH YELLOW PILOT LAMP 230V.
DRILLING TEMPLATE d. 24 MM.



3905

**BIPOLAR GREEN SWITCH
Ø 24MM.**

WITH GREEN PILOT LAMP 230V.
DRILLING TEMPLATE d. 24 MM.

Cooking / Pilot Lamps



3935

ORANGE PILOT LAMP 230V.

DRILLING TEMPLATE Ø 10 MM.



13913

RED PILOT LAMP 230V.

DRILLING TEMPLATE Ø 10 MM.



13922

GREEN PILOT LAMP 230V.

DRILLING TEMPLATE Ø 10 MM.



3926

GREEN PILOT LAMP 230/400V.

DRILLING TEMPLATE Ø 12 MM.



3927

YELLOW PILOT LAMP 230/400V.

DRILLING TEMPLATE Ø 12 MM.



3928

RED PILOT LAMP 230/400V.

DRILLING TEMPLATE Ø 12 MM.

Cooking / Electric Plates



5508

**ELECTRIC PLATE 300x300 MM.
3000W 400V.**

POWER 3000W 400V.
OUTER DIMENSIONS 300 X 300 MM.
EDGE OF STAINLESS STEEL

Product: **Ego**



5507

**ELECTRIC PLATE 300x300MM.
4000W 230V.**

POWER 4000W 230V.
OUTER DIMENSIONS 300 X 300 MM.
EDGE OF STAINLESS STEEL

Product: **Ego**



5509

**ELECTRIC PLATE 300x300 MM.
4000W 400V.**

POWER 4000W 400V.
OUTER DIMENSIONS 300 X 300 MM.
EDGE OF STAINLESS STEEL

Product: **Ego**



5500

ELECTRIC PLATE Ø 145 MM.

POWER 1500W 230V.
EDGE OF STAINLESS STEEL

Product: **Ego**



5501

ELECTRIC PLATE Ø 180 MM.

POWER 1500W 230V.
EDGE OF STAINLESS STEEL

Product: **Ego**



5502

ELECTRIC PLATE Ø 180 MM.

POWER 2000W 400V.
EDGE OF STAINLESS STEEL

Product: **Ego**



2999

ELECTRIC PLATE Ø 180 MM.

POWER 2000W 230V.
EDGE OF STAINLESS STEEL

Product: **Ego**



3000

ELECTRIC PLATE Ø 220 MM.

POWER 2600W 230V.
EDGE OF STAINLESS STEEL

Product: **Ego**



5505

ELECTRIC PLATE Ø 220 MM.

POWER 2600W 400V.
EDGE OF STAINLESS STEEL

Product: **Ego**



1250

UNIVERSAL KNOB Ø 70 MM.

HOLE CRESCENT SHAPED Ø 8 X 6,5 MM.
COMPLET WITH STICKER DISC
PILOTE SYMBOL

Product: **Pel**



1251

UNIVERSAL KNOB Ø 70 MM.

HOLE CRESCENT SHAPED Ø 10 X 8 MM.
COMPLET WITH STICKER DISC
PILOTE SYMBOL

Product: **Pel**



4025

BLACK TIMER KNOB Ø 40 MM.

HOLE CRESCENT SHAPED 4 X 4 MM.



4035

BLACK TIMER KNOB Ø 40 MM.

HOLE CRESCENT SHAPED
Ø 6 X 4,6 MM.



3105

**BLACK THERMOSTAT
KNOB 0 ÷ 90 °C**

HOLE CRESCENT SHAPED
Ø 6 X 6 MM.

Product: **Imit**



3106

**BLACK THERMOSTAT KNOP
0 ÷ 120 °C**

HOLE CRESCENT SHAPED Ø 6 X 4,6 MM.
FOR THERMOSTATS

Product: **Imit**



3151

**BLACK THERMOSTAT KNOB
30 ÷ 90 °C**

HOLE CRESCENT SHAPED Ø 6 X 4,6 MM.
FOR THERMOSTATS

Product: **Ego**



3152

**BLACK THERMOSTAT KNOB
30 ÷ 120 °C**

HOLE CRESCENT SHAPED Ø 6 X 4,6 MM.
FOR THERMOSTATS

Product: **Ego**



1561

BLACK MINISIT KNOB 1-8

Product: **Sit Controls**

Cooking / Tangential Motor Fans



5053

TANGENTIAL FAN Ø 60x180 MM. SX

FAN Ø 60 X 180 MM. MOTOR SX
POWER SUPPLY 230V. 50HZ.
MAXIMUM TEMPERATURE 135°C.

Product: **Coprel**

5054

TANGENTIAL FAN Ø 60x180 MM. DX

FAN Ø 60 X 180 MM. MOTOR DX
POWER SUPPLY 230V. 50HZ.
MAXIMUM TEMPERATURE 135°C.

Product: **Coprel**

5057

TANGENTIAL FAN Ø 60x270 MM. SX

FAN Ø 60 X 270 MM. MOTOR SX
POWER SUPPLY 230V. 50HZ.
MAXIMUM TEMPERATURE 135°C.

Product: **Coprel**



5058

TANGENTIAL FAN Ø 60x270 MM. DX

FAN Ø 60 X 270 MM. MOTOR DX
POWER SUPPLY 230V. 50HZ.
MAXIMUM TEMPERATURE 135°C.

Product: **Coprel**

5063

TANGENTIAL FAN Ø 60x360 MM. SX

FAN Ø 60 X 360 MM. MOTOR SX
POWER SUPPLY 230V. 50HZ.
MAXIMUM TEMPERATURE 135°C.

Product: **Coprel**

5064

TANGENTIAL FAN Ø 60x360 MM. DX

FAN Ø 60 X 360 MM. MOTOR DX
POWER SUPPLY 230V. 50HZ.
MAXIMUM TEMPERATURE 135°C.

Product: **Coprel**



5056

**WIRE HEATING ELEMENT
2000W 230V.**

FOR TANGENTIAL FAN
OF 180 MM.

Product: **Coprel**

5059

**WIRE HEATING ELEMENT
2000W 230V.**

FOR TANGENTIAL FAN
OF 270 MM.

Product: **Coprel**

Cooking / Energy Regulators



3280

**POWER REGULATOR 13A 230V EGO
50.57021.010**

FLOW RATE 13A
POWER SUPPLY 230V.
HALF MOON PIVOT Ø 6X4,6 MM.
MAXIMUM TEMPERATURE 125°C
Product: **Ego**



13201

**POWER REGULATOR 13A 230V
EGO 50.85021.000**

FLOW RATE 13A
POWER SUPPLY 230V.
HALF MOON PIVOT Ø 6X4,6 MM.
MAXIMUM TEMPERATURE 125°C
Product: **Ego**



3285

**POWER REGULATOR 13A 230V
EGO 50.55021.100**

FLOW RATE 13°
POWER SUPPLY 230V.
HALF MOON PIVOT Ø 6X4,6 MM.
MAXIMUM TEMPERATURE 125°C
Product: **Ego**



3284

**POWER REGULATOR 13A 240V
EGO 50.57071.010**

FLOW RATE 13A
POWER SUPPLY 240V.
HALF MOON PIVOT Ø 6X4,6 MM.
MAXIMUM TEMPERATURE 125°C
Product: **Ego**



13200

**POWER REGULATOR 13A 240V
EGO 50.87071.000**

FLOW RATE 13A
POWER SUPPLY 240V.
HALF MOON PIVOT Ø 6X4,6 MM.
MAXIMUM TEMPERATURE 125°C
Product: **Ego**

Cooking / Heating Elements



5584

ADHESIVE HEATING ELEMENT

POWER 500W - 230V.
DIMENSIONS 290 X 175 MM.
WITH SAFETY THERMOSTAT 150°C
SILICON CABLES 2000 MM.
Product: **Irca**



5587

ADHESIVE HEATING ELEMENT

POWER 1000W - 230V.
DIMENSIONS 400 X 290 MM.
WITH SAFETY THERMOSTAT 150°C C
SILICON CABLES 2000 MM.
Product: **Irca**



5565

OVEN HEATING ELEMENT

POWER 2500W - 230V.
DIMENSIONS d. 190 MM.
FLANGE 70 X 22 MM.
FOR CONVECTIONS OVEN



5618

INFRA-RED CERAMIC HEATING ELEMENT

POWER 250W 230V DIMENSIONS
245 X 60 MM.
DRY RUNNING

Product: **Irca**



15593

HEATING ELEMENT 1650W 230V.

DIMENSIONS 505 X 55 MM.
FLANGE 60 X 28 MM.
DRY RUNNING

Cooking / Water Valves



4183

WATER LOADING VALVE DX FOR COLD WATER

CONNECTION d. 1/2" FF.
DRILLING TEMPLATE 28 MM.

Product: **RDF**



4184

WATER LOADING VALVE SX FOR HOT WATER

CONNECTION d. 1/2" FF.
DRILLING TEMPLATE 28 MM.

Product: **RDF**



4176

LOADING VALVE FOR PASTACOOKER DX

CONNECTION $\varnothing$ 1/2" FF.
HALF MOON PIVOT $\varnothing$ 10 X 8 MM.
FOR PASTACOOKER AND COOKING
POT NEW SERIES
Product: **RDF**



4177

LOADING VALVE PASTA COOKER DX

CONNECTION $\varnothing$ 1/2" FF.
HALF MOON PIVOT $\varnothing$ 10 X 8 MM.
FOR PASTACOOKER AND COOKINGPOT
NEW SERIES
Product: **RDF**



1201

GAS TAP PEL 20-SV WITHOUT PILOT T.C.

VERTICAL WITHOUT PILOT FLAME
CONNECTIONS 3/8" MM.
CONNECTION THERMOCOUPLE 8 X 1
HALF MOON PIVOT Ø 8 X 6,5 MM.
Product: **Pel**

1202

GAS TAP PEL 21-SV WITH PILOT T.C.8X1

VERTICAL WITH PILOT FLAME
CONNECTIONS 3/8" MM.
CONNECTION THERMOCOUPLE 8 X 1
HALF MOON PIVOT Ø 8 X 6,5 MM.
Product: **Pel**

1203

GAS TAP PEL 22-SO VALVED T.C.8X1

HORIZONTAL WITH PILOT FLAME
CONNECTIONS 1/2" MM.
CONNECTION THERMOCOUPLE 8 X 1
HALF MOON PIVOT Ø 10 X 8 MM.
Product: **Pel**



1205

GAS TAP PEL 22-SO VALVED T.C.9X1

HORIZONTAL WITH PILOT FLAME
CONNECTIONS 1/2" MM.
CONNECTION THERMOCOUPLE 9 X 1
HALF MOON PIVOT Ø 10 X 8 MM.
Product: **Pel**

1206

GAS TAP PEL 22-SV VALVED T.C.9X1

VERTICAL WITH PILOT FLAME
CONNECTIONS 1/2" MM.
CONNECTION THERMOCOUPLE 9 X 1
HALF MOON PIVOT Ø 10 X 8 MM.
Product: **Pel**

1212

THERMOSTATIC TAP PEL 24 ST 100/320°C.

TEMPERATURE 120-320°C.
FIXED CONNECTIONS 1/2" MM.
CONNECTION THERMOCOUPLE 9 X 1
CAP. 900 MM. BULB 6 X 100 MM.
Product: **Pel**



1210

THERMOSTATIC TAP PEL 24 ST 110/310°C.

TEMPERATURE 110-310°C.
SWIVEL CONNECTIONS 1/2" MM.
CONNECTION THERMOCOUPLE 9 X 1
CAPI. 900 MM. BULB 6 X 100 MM HALF
MOON PIVOT Ø 10 X 8 MM.
Product: **Pel**

1213

THERMOSTATIC TAP PEL 25 ST 100/300°C.

TEMPERATURE 100-300°C.
FIXED CONNECTIONS 3/8" MM.
CONNECTION THERMOCOUPLE 9 X 1
CAPI. 1200 MM. BULB 6X100 MM HALF
MOON PIVOT Ø 8 X 6,5 MM.
Product: **Pel**



4047

MECHANICAL TIMER

MANUAL LOADING 15 MINUTES
2 POLES- 16 CONNECTIONS (4)A 250V.
HALF MOON PIVOT 6X4,6 MM.
FOR TOASTERS



4030

MECHANICAL TIMER

MANUAL LOADING 15 MINUTES
2POLES – 16 CONNECTIONS (3)A 250V.
HALF MOON PIVOT 6X4,6 MM.
FOR TOASTERS



4043

MECHANICAL TIMER

MANUAL LOADING 120 MINUTES WITH
BEEPER MANUAL POSITION
ANTICLOCKWISE 2 POLES- 16
CONNECTIONS (3)A 250V.
HALF MOON PIVOT 6X4,6 MM.



4040

MECHANICAL TIMER


MANUAL LOADING 30 MINUTES WITH
BEEPER MANUAL POSITION
ANTICLOCKWISE 2 POLES - 16
CONNECTIONS (3)A 250V.
HALF MOON PIVOT 6X4,6 MM.



4036

SCREEN PRINTED PLATE 15 MINUTES


BRUSHED ALLUMINIUM



4038

SCREEN PRINTED PLATE 60 MINUTES

BRUSHED ALLUMINIUM



4039

SCREEN PRINTED PLATE 120 MINUTES

BRUSHED ALLUMINIUM

Cooking / Thermocouples



1804

**THERMOCOUPLE M8x1 CM.85
NORMAL**

Product: **Sit Controls**



1818

**THERMOCOUPLE M8x1 CM.100
NORMAL**

Product: **Sit Controls**



1808

**THERMOCOUPLE M9x1 CM.60
NORMAL**

Product: **Sit Controls**



1809

**THERMOCOUPLE M9x1 CM.85
NORMAL**

Product: **Sit Controls**



1901

**THERMOCOUPLE M8x1 CM.45
THREADED**

Product: **Sit Controls**



1902

**THERMOCOUPLE M8x1 CM.60
THREADED**

Product: **Sit Controls**



1821

**THERMOCOUPLE M8x1 CM.45
SPECIAL**

Product: **Sit Controls**



1914

**THERMOCOUPLE M9x1 CM.85
SPECIAL**

Product: **Sit Controls**



1855

**THERMOCOUPLE M9x1 CM.60
DISCONTINUED**

Product: **Sit Controls**



1859

**THERMOCOUPLE M9x1 CM.60
DISCONTINUED**

WITH CABLE LENGHT 60 CM.
FASTON FEMALE 6,35 X 0,8 MM.
LIGHTING +- 6 SECONDS SWITCHING
OFF 30-60 SECONDS



1857

**THERMOCOUPLE SIT M9x1 CM.
100 DISCONTINUED WITH CABLE**

WITH CABLE LENGHT 100 CM.
FASTON FEMALE 6,35 X 0,8 MM.
LIGHTING +- 6 SECONDS
SWITCHING OFF 30-60 SECONDS



1960

UNIVERSAL THERMOCOUPLE CM.90

LENGHT 90 CM. COMPLETE WITH 10
UNIVERSAL FITTINGS





3215

THERMOMETER

RANGE TEMPERATURE 0 ÷ 250 °C
METALLIC CASE Ø 52 MM.
WHITE COLOR DIAL DIMENSIONS
BULB Ø 4 X 76 MM.
CAPILLARY DA 1300 MM.



3205

THERMOMETER

RANGE TEMPERATURE 0 ÷ 120°C
METALLIC CASE Ø 52 MM.
WHITE COLOUR DIAL
BULB DIMENSIONS Ø 6 X 27 MM.
COVERED CAPILLARY 1500 MM.



3206

THERMOMETER

RANGE TEMPERATURE 50 ÷ 350°C
METALLIC CASE Ø 52 MM.
WHITE COLOUR DIAL
BULB DIMENSIONS Ø 6 X 30 MM.
COVERED CAPILLARY 1500 MM.



3216

THERMOMETER

RANGE TEMPERATURE 0 ÷ 600°C
METALLIC CASE Ø 60 MM.
BLACK COLOUR DIAL BULB
DIMENSIONS Ø 8 X 145 MM.
CAPILLARY 1000 MM.



3209

THERMOMETER

RANGE TEMPERATURE 0 ÷ 250 °C
METALLIC CASE Ø 52 MM.
WHITE COLOUR DIAL
BULB DIMENSIONS Ø 6 X 17 MM.
CAPILLARY 1500 MM.



3125

MONOPHASE THERMOSTAT

ADJUSTMENT RANGE $35 \div 200^{\circ}\text{C}$.
BULB DIMENSIONS $\varnothing 6 \times 80 \text{ MM}$.
CAPILLARY LENGHT 900 MM

Product: **Ego**



3135

MONOPHASE THERMOSTAT

ADJUSTMENT RANGE $50 \div 270^{\circ}\text{C}$.
BULB DIMENSIONS d. $3 \times 228 \text{ MM}$.
CAPILLARY LENGHT 1300 MM.

Product: **Ego**



3138

MONOPHASE THERMOSTAT

ADJUSTMENT RANGE $50 \div 320^{\circ}\text{C}$.
BULB DIMENSIONS d. $3 \times 220 \text{ MM}$.
CAPILLARY LENGHT 900 MM.

Product: **Ego**



3162

MONOPHASE THERMOSTAT

ADJUSTMENT RANGE $50 \div 500^{\circ}\text{C}$.
BULB DIMENSIONS d. $4 \times 230 \text{ MM}$.
CAPILLARY LENGHT 900 MM.

Product: **Ego**



3131

SAFETY MONOPHASE THERMOSTAT

FIXED SAFETY CALIBRATION 230°C .
BULB DIMENSIONS d. $4,5 \times 120 \text{ MM}$.
CAPILLARY LENGHT 1450 MM.

Product: **Ego**



3139

THREEPHASE THERMOSTAT

ADJUSTMENT RANGE $50 \div 320^{\circ}\text{C}$.
BULB DIMENSIONS $\varnothing 3 \times 220 \text{ MM}$.
CAPILLARY LENGHT 900 MM.

Product: **Ego**



13043

SAFETY THREEPHASE THERMOSTAT

FIXED SAFETY CALIBRATION 245°C .
BULB DIMENSIONS $\varnothing 4 \times 120 \text{ MM}$.
CAPILLARY LENGHT 1750 MM.

Product: **Ego**

Cooking / Gas Pipes



3297

GAS HOSE 1/2"FF 1000 MM.

SUITABLE FOR NATURAL GAS OR GPL
REGULATION OF REFERENCE
UNI EN 14800:2007
REGULATION INST. UNI 7129:2008
COMPLETE WITH GASKET



3299

GAS HOSE 1/2"FF 2000 MM.

SUITABLE FOR NATURAL GAS or GPL
REGULATION REFERENCE
UNI EN 14800:2007
REGULATION INST. UNI 7129:2008
COMPLETE WITH GASKET



3293

GAS HOSE 1/2"MF 500 MM.

SUITABLE FOR NATURAL GAS or GPL
REGULATION REFERENCE
UNI EN 14800:2007
REGULATION INST. UNI 7129:2008
COMPLETE WITH GASKET



3294

GAS HOSE 1/2"MF 1000 MM.

SUITABLE FOR NATURAL GAS or GPL
REGULATION REFERENCE
UNI EN 14800:2007
REGULATION INST. UNI 7129:2008
COMPLETE WITH GASKET



3295

GAS HOSE 1/2"MF 1500 MM.

SUITABLE FOR NATURAL GAS or GPL
REGULATION REFERENCE
UNI EN 14800:2007
REGULATION INST. UNI 7129:2008
COMPLETE WITH GASKET



3296

GAS HOSE 1/2"MF 2000 MM.

SUITABLE FOR NATURAL GAS or GPL
REGULATION REFERENCE
UNI EN 14800:2007
REGULATION INST. UNI 7129:2008
COMPLETE WITH GASKET



1506

MINISIT VALVE FOR FRYERS 110÷190°C.

TEMPERATURE RANGE 110-190°C.
INLET Ø 1/2" F - OUTLET d. 3/8" F
CAPILLARY 105 CM.
BULB 6 X 110 MM.
Product: **Sit Controls**



1513

MINISIT VALVE FOR FRYERS 110÷190°C.

TEMPERATURE RANGE 110-190°C INLET
OUTLET Ø 3/8" FF
CAPILLARY 105 CM.
BULB 4 X 200 MM.
Product: **Sit Controls**



1514

MINISIT VALVE FOR FRYERS 110÷190°C.

TEMPERATURE RANGE 50-190°C.
INLET- Ø 1/2" F - OUTLET Ø 3/8"
F CAPILLARY 120 CM.
BULB 5 X 95 MM.
Product: **Sit Controls**



1601

SIT 820 NOVA VALVE

VALVE SIT 820 NOVA
THERMOCOUPLE CONNECTION 9 X 1
CALIBRATION OF PRESSURE 3 ÷ 30
MBAR FEEDING 230V. 50HZ
Product: **Sit Controls**



1511

EUROSIT 630 VALVE FOR OVEN 100÷340°C.

TEMPERATURE 100-340°C.
INLET – OUTLET d. 3/8" FF
CAPILLARY 105 CM.
BULB 4 X 72 MM.
Product: **Sit Controls**



1611

SIT 820 NOVA VALVE 0.820.031

INLET – OUTLET d. 1/2" F
THERMOCOUPLE CONNECTION 9 X 1
PRESSURE CALIBRATION 5-50 MBAR
MBAR FEEDING 230V. 50HZ
Product: **Sit Controls**



1516

EUROSIT VALVE 630 FRY TOP CROMO 60÷300°C.

TEMPERATURE RANGE 60-300°C.
INLET – OUTLET Ø 3/8" FF
THERMOCOUPLE CONNECTION A 9 X 1
CAPILLARY 105 CM. BULB 4 X 74 MM.
Product: **Sit Controls**



1541

FRYER BULB 100÷200°C. Ø 6 MM.

FOR MINISIT VALVE FRYER 100-200°C
CAPILLARY 105 CM.
BULB 6 X 110 MM.
Product: **Sit Controls**



1536

FRYER BULB 50÷190°C. Ø 5 MM.

FOR MINISIT VALVE FRYER 50-190°C
CAPILLARY 105 CM.
BULB 5 X 110 MM.
Product: **Sit Controls**



3807

12LT MANUAL WATER SOFTNER 3/4 M.

FITTINGS CONNECTION Ø 3/4" M.
CAPACITY STAINLESS STEEL TANK 12 LT.
RESIN CONTAINED 10 LT.
SALT FOR RIGENERATION 1,5 KG. DIM.
Ø 19 CM. - HEIGHT 51 CM.



3808

16LT MANUAL WATER SOFTNER - 3/4 M.

FITTINGS CONNECTION Ø 3/4" M.
CAPACITY STAINLESS STEEL TANK 16 LT.
RESIN CONTAINED 12,5 LT.
SALT FOR RIGENERATION 2 KG. DIM.
Ø 19 CM. - HEIGHT 61 CM.



3811

8LT MANUAL WATER SOFTNER WITH 4 POSITIONS BY-PASS - 3/8 M.

FITTINGS CONNECTION Ø 3/8" M.
CAPACITY STAINLESS STEEL TANK 8 LT.
RESIN CONTAINED 6 LT.
SALT FOR RIGENERATION 1 KG. DIM.
Ø 19 CM. - HEIGHT 41 CM.



3806

8LT MANUAL WATER SOFTNER 3/4 M.

FITTINGS CONNECTION Ø 3/4' M.
CAPACITY STAINLESS STEEL TANK 8LT.
RESIN CONTAINED 6 LT.
SALT FOR RIGENERATION 1 KG
DIM. Ø 19 CM. - HEIGHT 41 CM.



702592

VOLUMETRIC AUTOMATIC WATER SOFTNER 8 Lt ACQUA PRO V

INLET - OUTLET FITTING 3/8
DRAIN FITTING Ø 14 MM.
ANTI FLOODING
RESIN CONTAINED: 5,2 LT
SALT CONTAINED: 10 KG.
DIMENSIONS 470X220XH455 MM.



702593

VOLUMETRIC AUTOMATIC 10 LT WATER SOFTNER AQUA PRO V

INLET - OUTLET FITTING 3/8
DRAIN FITTING: Ø 14 MM ANTI
FLOODING RESIN CONTAINED: 7 LT
SALT CONTAINED: 25 KG.
DIMENSIONS 530X245XH455 MM.




702594

VOLUMETRIC AUTOMATIC WATER SOFTNER 14 LT ACQUA PRO V

INLET - OUTLET FITTING: 3/8
DRAIN FITTING Ø 14 MM.
ANTI - FLOODING
RESIN CONTAINED: 9 LT SALT
CONTAINED 25 KG.
DIMENSIONS 530X245XH555 MM.

Washing-equipment / Baskets

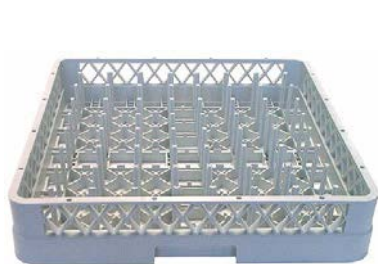


4633

BASKET 18 PLATES 500x500X108H

EXTERNAL DIMENSIONS 500 X 500 MM.
TOTAL HEIGHT 108 MM.

Product: **Giados**

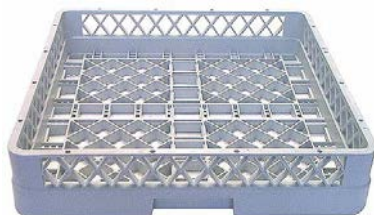

4630

UNIVERSAL BASE BASKET 500x500X108H

EXTERNAL DIMENSIONS 500 X 500 MM.
TOTAL HEIGHT 108 MM.

Product: **Giados**



4540

PLASTIC BASKET 400x400 MM.H150

EXTERNAL DIMENSIONS 400 X 400 MM.
TOTAL HEIGHT 150 MM.

Product: **Giados**



4539

PLASTIC BASKET 380x380 MM.H150

EXTERNAL DIMENSIONS 380 X 380 MM.
TOTAL HEIGHT 150 MM.

Product: **Giados**



4538

PLASTIC BASKET 350x350 MM.H150

EXTERNAL DIMENSIONS 350 X 350 MM.
TOTAL HEIGHT 150 MM

Product: **Giados**



4536

PLASTIC BASKET Ø 400 MM.H180

EXTERNAL DIAMETER 400 MM.
TOTAL HEIGHT 180 MM.

Product: **Giados**



4556

PLASTIC BASKET Ø 380 MM.H170

EXTERNAL DIAMETER 380 MM.
TOTAL HEIGHT 170 MM.

Product: **Giados**



4534

PLASTIC BASKET Ø 350 MM.H160

EXTERNAL DIAMETER 380 MM.
TOTAL HEIGHT 170 MM

Product: **Giados**



4589

PVC CUTLERY BASKET

DIMENSIONS d. 110 X 110 MM.
TOTAL HEIGHT 130 MM.

Product: **Giados**

Washing-equipment / Dosers



2819

POLISHING DOSER MOD. 3000

MEMBRANE DOSER

Product: **Giados**



2891

POLISHING DOSER KIT

BUTTON FOR INITIAL INPUT
COMPLETE MOUNTING KIT INCLUDED

Product: **Giados**



2889

POLISHING DOSER MOD.2000

MEMBRANE DOSER

Product: **Giados**



6959

**POLISHING PERISTALTIC PUMP
PR1 230V**

VARIABLE FLOW MAX 0.3 / 1 LT.
MOUNTING KIT INCLUDED

Product: **Seko**



6958

**DETERGENT PERISTALTIC PUMP
PR4 230V.**

VARIABLE FLOW MAX 0.6 / 4 LT.
MOUNTING KIT INCLUDED

Product: **Seko**



6961

POLISHING PERISTALTIC PUMP SEKO

VARIABLE FLOW MAX 0.4 LT./H
POWER SUPPLY 230V. 50/60HZ
MOUNTING KIT INCLUDED

Product: **Seko**



6960

**DETERGENT PERISTALTIC PUMP
SEKO**

VARIABLE FLOW MAX 3.0 LT./H
POWER SUPPLY 230V. 50/60HZ

Product: **Seko**



2796

**POLISHING PERISTALTIC PUMP
PG-04**

FIXED FLOW 0.4 LT./H 3 BAR POWER
SUPPLY 230V. 50/60HZ

Product: **Seko**



2795

**DETERGENT PERISTALTIC PUMP
PG-03**

FIXED FLOW 3 LT./H 0.1 BAR POWER
SUPPLY 230V. 50/60HZ

Product: **Seko**



8203

ELECTRIC PUMP 0.15HP 230V.

Ø EXTERNAL INLET 28 MM.
 Ø EXTERNAL OUTLET 28 MM.
 2800 G/H - 0,16 KW. - 1,5A - 50HZ
 STARTER CAPACITOR 6,3 MF.
 Product: **Alba Pumps**



8204

ELECTRIC PUMP 0.20HP 230V. ADAPTABLE ZF115SX LGB

Ø EXTERNAL INLET 28 MM.
 Ø EXTERNAL OUTLET 28 MM.
 2800 G/H - 0,22 KW. - 1,5A - 50HZ
 STARTER CAPACITOR 6,3 MF.
 Product: **Alba Pumps**



8202

ELECTRIC PUMP 0.20HP 230V.

Ø EXTERNAL INLET 28 MM.
 Ø EXTERNAL OUTLET 28 MM.
 2800 G/H - 0,15 KW. - 1,5A - 50HZ
 STARTER CAPACITOR 6,3 MF.
 Product: **Alba Pumps**



8216

ELECTRIC PUMP 0,30HP 230V.

Ø EXTERNAL INLET 28 MM.
 Ø EXTERNAL OUTLET 28 MM.
 2800 G/H - 0,22 KW. - 1,6A - 50HZ
 STARTER CAPACITOR 6,3 MF.
 Product: **Alba Pumps**



4248

ELECTRIC PUMP 1HP 230V.

Ø EXTERNAL INLET 45 MM.
 Ø EXTERNAL OUTLET 40 MM.
 2850 G/H - 0,736 KW. - 4,5A
 STARTER CAPACITOR 16 MF.
 Product: **Alba Pumps**



4237

ELECTRIC PUMP 0,80HP 230V.

Ø EXTERNAL INLET 50 MM.
 Ø EXTERNAL OUTLET 50 MM.
 2800 G/H - 0,60 KW - 3,8A
 STARTER CAPACITOR 16 MF.
 Product: **Alba Pumps**



8214

ELECTRIC PUMP 2HP 230/400V.

Ø EXTERNAL INLET 63 MM.
 Ø EXTERNAL OUTLET 63 MM.
 2850 G/H - 1,47KW. - 5,8 / 3,4A - 50HZ

Product: **Alba Pumps**



8314

ELECTRIC PUMP 1,5HP 230V.

Ø EXTERNAL INLET 60 MM.
 Ø EXTERNAL OUTLET 50 MM.
 2850 G/H - 1,1 KW. - 2,9A - 50HZ

Product: **Alba Pumps**



8211

ELECTRIC PUMP 1HP 230V.

Ø EXTERNAL INLET 45 MM.
 Ø EXTERNAL OUTLET 40 MM.
 2850 G/H - 0,736 KW. - 4,5A
 STARTER CAPACITOR 16 MF.

Product: **Alba Pumps**



3901

**RED BIPOLAR SWITCH
30x22 MM.**

WITH PILOT LAMP 230V. RED
DRILLING TEMPLATE 30 X 22 MM.



3902

**ORANGE BIPOLAR SWITCH
30x22 MM.**

WITH PILOT LAMP 230V. ORANGE
DRILLING TEMPLATE 30 X 22 MM.



3897

**RED BIPOLAR DIVERTER
30x22 MM. W/PROTECTION**



3898

**RED BIPOLAR DIVERTER
30x22 MM. W/PROTECTION**

WITH PILOT LAMP 230V.
GREEN WITH BUTTON PROTECTION
DRILLING TEMPLATE 30 X 22 MM.



3893

**GREEN BIPOLAR SWITCH
30x22 MM.**

WITH PILOT LAMP 230V.
GREEN CONTACTS NORMALLY OPEN
WITH BUTTON PROTECTION DRILLING
TEMPLATE 30 X 22 MM.



3900

RED BIPOLAR SWITCH

WITH PILOT LAMP 230V.
RED CONTACTS NORMALLY CLOSED
WITH BUTTON PROTECTION DRILLING
TEMPLATE 30 X 22 MM.



3890

**RED BIPOLAR
SWITCH Ø 24 MM.**

WITH PILOT LAMP 230V.
RED DRILLING TEMPLATE d. 24 MM.



3891

**ORANGE BIPOLAR
SWITCH d.24 MM.**

WITH PILOT LAMP 230V.
YELLOW DRILLING TEMPLATE d. 24 MM.



3905

**GREEN BIPOLAR
SWITCH Ø 24 MM.**

WITH PILOT LAMP 230V.
GREEN DRILLING TEMPLATE d. 24 MM.

Washing-equipment / Pilot Lamps



3935

ORANGE PILOT LAMP 230V.

DRILLING TEMPLATE Ø 10 MM.



13913

RED PILOT LAMP 230V.

DRILLING TEMPLATE Ø 10 MM.



13922

GREEN PILOT LAMP 230V.

DRILLING TEMPLATE Ø 10 MM.



3926

GREEN PILOT LAMP 230/400V.

DRILLING TEMPLATE Ø 12 MM.



3927

YELLOW PILOT LAMP 230/400V.

DRILLING TEMPLATE Ø 12 MM.



3928

RED PILOT LAMP 230/400V.

DRILLING TEMPLATE Ø 12 MM.



C100006

SHOWER GROUP MIXER SINGLE HOLE SINGLE-LEVER

BARREL LENGTH 300 MM.
DRILLING TEMPLATE Ø 32,5 MM.
CONNECTION Ø 3/8"

FIXING BRACKETS INCLUDED

Product: **Monolith**



C1000003

SHOWER GROUP MIXER SINGLE HOLE

BASIN DRILLING TEMPLATE Ø 27 MM.
CONNECTION Ø 1/2"
FIXING BRACKETS INCLUDED

Product: **Monolith**



C1000002

SHOWER GROUP MIXER SINGLE HOLE WITH BARREL

BARREL LENGTH 220 MM.
BASIN DRILLING TEMPLATE Ø 27 MM.
CONNECTION Ø 1/2"

FIXING BRACKETS INCLUDED

Product: **Monolith**



23600012

SHOWER GROUP MIXER SINGLE HOLE WITH BARREL

BARREL LENGTH 300 MM.
DRILLING TEMPLATE Ø 27 MM.
CONNECTION Ø 1/2"

FIXING BRACKET INCLUDED

Product: **Monolith**



23600014

SHOWER GROUP MIXER – TWO HOLES – WITH BARREL

BARREL LENGTH 300 MM.
DRILLING TEMPLATE Ø 27 MM.
HOLES CENTER DISTANCE 155 MM.

CONNECTION Ø 3/4"

Product: **Monolith**



C1000005

SINGLE HOLE VALVE MIXER WITH SHOWER

BASIN DRILLING TEMPLATE 30 MM.
FLEXIBLE CONNECTION Ø 1/2"
TOTAL HEIGHT 450 MM.

Product: **Monolith**

Washing-equipment / Shower groups and Valves



23600021

MIXER VALVE Ø 1/2"
SINGLE HOLE SINGLE-LEVER

BARREL LENGTH 255 MM.
DRILLING TEMPLATE Ø 30,5 MM.
FLEXIBLE CONNECTION Ø 1/2"
CLINIC LEVER IN POLYCARBONATE
Product: **Monolith**



23600020

MIXER VALVE SINGLE HOLE
SINGLE-LEVER

BARREL LENGTH 300 MM.
DRILLING TEMPLATE Ø 27 MM.
HOLES CENTER DISTANCE 155 MM.
CONNECTION Ø 3/4"
Product: **Monolith**



4758

MIXER CARTRIDGE KLARCO

FOR SINGLE HOLE AND TWO-WHOLE
PARTS

Product: **Monolith**



23600007

SINGLE HOLE CARTRIDGE
FOR MIXER

Product: **Monolith**



23600019

SPARE CARTRIDGE

Product: **Monolith**



23600010

MIXER SCREW

Product: **Monolith**



23600009

SPARE SHOWER BODY

Product: **Monolith**



4710

VALVE SCREW TYPE C
607/ 616

Product: **Monolith**



23600015

SPARE CYLINDRICAL LEVER

Product: **Monolith**



4720

**DISHWASHER SHOWER
SINGLE HOLE AND SINGLE-LEVER**

BARREL LENGTH 300 MM.
BASIN DRILLING TEMPLATE 37 MM.
CONNECTION Ø 1/2"
POLYCARBONATE LEVER GREY COLOUR
Pruduct: **RDF**



4727

**DISHWASHER SHOWER
SINGLE HOLE**

BASIN DRILLING TEMPLATE 30 MM.
CONNECTION Ø 3/8"
FIXING BRACKETS INCLUDED
Pruduct: **RDF**



14701

MIXER SHOWER SINGLE-LEVER

BASIN DRILLING TEMPLATE 32 MM.
FLEXIBLE CONNECTION Ø 1/2"
Pruduct: **RDF**



4721

**DISHWASHER SHOWER
SINGLE HOLE**

BARREL LENGTH 300 MM.
BASIN DRILLING TEMPLATE 30 MM.
CONNECTION Ø 3/8"
FIXING BRACKETS INCLUDED
Pruduct: **RDF**



4733

**MIXER SHOWER TWO HOLES
SINGLE-LEVER**

BARREL LENGTH 300 MM.
HOLES CENTER DISTANCE 155 MM.
CONNECTION Ø 1/2"
POLYCARBONATE LEVER GREY COLOUR
Pruduct: **RDF**



14700

SINGLE-LEVER MIXER MOLLY

BASIN DRILLING TEMPLATE 32 MM.
FLEXIBLE CONNECTION Ø 1/2 "
TOTAL WEIGH 400 MM
Pruduct: **RDF**

Washing-equipment / Shower groups and Valves



4736

MIXER VALVE SINGLE HOLE SINGLE-LEVER

BARREL LENGTH 300 MM.
BASIN DRILLING TEMPLATE 30 MM.
FLEXIBLE CONNECTION $\varnothing 1/2''$
POLYCARBONATE LEVER GREY COLOUR
Product: **RDF**



4716

MIXER VALVE TWO HOLES SINGLE-LEVER 3/4'

CONNECTION $\varnothing 3/4''$
BARREL LENGTH 300 MM.
HOLES CENTER DISTANCE 155 MM.
POLYCARBONATE LEVER GREY COLOUR
Product: **RDF**



14709

MIXER CARTRIDGE

Product: **RDF**



14702

MIXER CARTRIDGE

Product: **RDF**



14704

MIXER CARTRIDGE

Product: **RDF**



4746

MIXER SCREW

Product: **RDF**



4747

MIXER SCREW

Product: **RDF**



4762

GREY LEVER SUBSTITUTION KIT – OLD TYPE

THE KIT INCLUDES:
1 – SPARE BLACK CARTRIDGE
1 – CLINICAL LEVER SUBSTITUTION KIT
FOR VALVES WITH CLINICAL LEVER
PRODUCED UP TO DEC.2015
Product: **RDF**

Product: **RDF**



4741

SHOWER BODY

THREADED CONNECTION $\varnothing 1/2''$
WITH RUBBER BUMPER RING
Product: **RDF**

Product: **RDF**

Washing-equipment / Inlet hoses



3333

NET INLET HOSE CM.150 3/4 F. x 3/4 FC.

NON-TOXIC WATER HOSE
NYLON NUT REINFORCED WITH CURVE
MAX PRESSURE 60 BAR
HOSE d. 10 X 15 MM.



3314

INLET HOSE CM.150 CONN. 3/4 F.x 3/4 FC. NYLON

NYLON NUT REINFORCED WITH CURVE
MAX TEMPERATURE 90°C.
MAX PRESSURE 60 BAR
HOSE d. 13 X 20 MM.



3336

INLET HOSE CM.150 CONN. 3/4 F.x 3/4 FC. NYLON

NYLON NUT REINFORCED WITH CURVE
MAX TEMPERATURE 60°C.
MAX PRESSURE 20 BAR
HOSE d. 10 X 15 MM.
GASKETS INCLUDED



3311

INLET HOSE CM.150 CONN. 3/4 F.x 3/4 FC.

METALLIC NUT WITH NYLON CURVEE
MAX TEMPERATURE 90°C.
MAX PRESSURE 60 BAR
HOSE d. 13 X 20 MM.



3334

NET INLET HOSE CM.100 CONN. 3/4 F.x 3/4 M.

MAX PRESSURE 60 BAR ASSEMBLED WITH Y FITTING
1 HOSE 100 CM. LENGTH d. 3/4' F.
2 HOSES 20 CM. LENGTH d. 3/4' FC.



3335

INLET HOSE CM.150 CONN. 3/4 F.x 3/4 F. NYLON

NYLON NUT REINFORCED
MAX TEMPERATURE 60°C.
MAX PRESSURE 20 BAR
PIPE d. 10 X 15 MM.
GASKETS INCLUDED



3302

INLET HOSE CM.150 CONN. 3/4" FF.

METALLIC NUT
MAX TEMPERATURE 90°C.
MAX PRESSURE 60 BAR
HOSE d. 13 X 20 MM.



3303

INLET HOSE CM.200 CONN. 3/4 FF.

METALLIC NUT
MAX TEMPERATURE 90°C.
MAX PRESSURE 60 BAR
HOSE d. 13 X 20 MM.

Washing-equipment / Drain hoses



3351

**DRAIN HOSE CM.200
Ø 20/28 MM.**

TOTAL LENGTH 200 CM.
SLEEVE INSIDE d. 20 / 28 MM.
DUTRAL SLEEVE



3352

**DRAIN HOSE CM.150
Ø 24/28 MM.**

TOTAL LENGTH 150 CM.
SLEEVE INSIDE d. 24 / 28 MM.
DUTRAL SLEEVE



3361

**DRAIN HOSE CM.200 Ø 20/21 MM.
W/CURVE**

TOTAL LENGTH 200 CM.
SLEEVE INSIDE d. 20 MM.
CURVE INSIDE d. 21 MM.
DUTRAL SLEEVE



3355

**DRAIN HOSE CM.150
Ø 24/28 MM. W/CURVE**

TOTAL LENGTH 150 CM.
SLEEVE INSIDE d. 24 MM.
CURVE INSIDE d. 28 MM.
DUTRAL SLEEVE



3354

**DRAIN HOSE CM.200
Ø 32/36 MM**

TOTAL LENGTH 200 CM.
SLEEVES INSIDE d. 32 / 36 MM.
DUTRAL SLEEVE



3360

**DRAIN HOSE CM.150
Ø 21/32 MM.**

TOTAL LENGTH 150 CM.
SLEEVE INSIDE d. 21 MM.
CURVE INSIDE d. 32 MM.
DUTRAL SLEEVE



3398

**DRAIN HOSE CM.150
Ø 32/40 WITH CURVE**

TOTAL LENGTH 150 CM.
SLEEVE INSIDE d. 32 MM.
CURVE INSIDE d. 40 MM.
WITH NOSE UNIT VENTING
PIPE DUTRAL SLEEVE



3372

**DRAIN HOSE CM.200
Ø 32/40 MM.**

TOTAL LENGTH 200 CM.
SLEEVE INSIDE d. 32 / 40 MM.
DUTRAL SLEEVE



4841

**RECESSED HINGE
LONG SQUARE PIN**

BRACKET DIMENSIONS 73 X 24 MM.
TOTAL LENGTH 118 MM.
SQUARE PIN 7 X 7 H 15 MM



4842

**RECESSED HINGE
SHORT SQUARE PIN**

BRACKET DIMENSIONS 73 X 24 MM.
TOTAL LENGTH 110 MM.
SQUARE PIN 7 X 7 H 8 MM



82

**RECESSED HINGE FERMOD 176
LONG PIN**

BRACKET DIMENSIONS 73X24 MM.
TOTAL LENGTH 118 MM.
SQUARE PIN 11 X 11 H 15 MM.

Product: **Fermod**



4852

RECESSED HINGE FERMOD 175

BRACKET DIMENSIONS 75 X 25 MM.
TOTAL LENGTH 104 MM.
CROSS PIN H 5 MM.
WITH MOUNTING KIT
Product: **Fermod**



4860

RECESSED HINGE FERMOD 176

BRACKET DIMENSIONS 73 X 24 MM.
TOTAL LENGTH 118 MM.
SQUARE PIN 8 X 8 H 5 MM.
WITH MOUNTING KIT
Product: **Fermod**

R134a

CUBIGELL HMBP



CODE	MODEL	HP	CC	EL. SCHEME	LRA	A	W	COOLING CAPACITY W*	V/Ph/Hz
30500107	B30G	1/10	3.1	CSIR	4.0	0.8	97	147	220-240/1/50
30500027	B35GL	1/10	3.5	CSIR	5.5	0.8	93	157	220-240/1/50
30500108	B38G	1/8	3.8	CSIR	4.2	0.8	109	184	220-240/1/50
30500109	GL45TB	1/6	4.5	CSIR	6.5	1	143	217	220-240/1/50
30500111	GL60TB	1/5	5.7	CSIR	8.3	1.2	170	270	220-240/1/50
30500112	GL80TB	1/4L	7.6	CSIR	9.8	1.4	211	347	220-240/1/50
30500113	GL90TB	1/4	8.8	CSIR	12	1.6	239	412	220-240/1/50
30500012	GLY12RAa	1/3	10.7	CSIR	14.8	2.0	303	514	220-240/1/50
30500114	GP14TB	3/8	14.1	CSIR	18	2.5	380	622	220-240/1/50
30500115	GP16TB	1/2L	16.1	CSIR	20	3.2	466	738	220-240/1/50
30500116	GX18TB	1/2	18.4	CSIR	24	3.6	509	865	220-240/1/50
30500117	GX21TB	5/8	20.7	CSIR	26	4.2	566	969	220-240/1/50
30500118	GX23TB	5/8	23.2	CSIR	29	4.5	630	1067	220-240/1/50
30500119	GS26TB	3/4	25.9	CSIR	32	4.8	658	1262	220-240/1/50
30500120	GS34TB	1	34.4	CSR	37	4.7	864	1832	220-240/1/50

*TEST CONDITIONS: EN 12900 (-10°C +45°C)

30500106	L30HL	1/12	3.1	RSIR	2.6	0.6	70	63	220-240/1/50
----------	-------	------	-----	------	-----	-----	----	----	--------------

*TEST CONDITIONS: EN 12900 (-25°C +45°C)

R404a

R507

CUBIGELL HMBP

CODE	MODEL	HP	CC	EL. SCHEME	LRA	A	W	COOLING CAPACITY W*	V/Ph/Hz
30500121	ML45TB	1/5	4.5	CSIR	9.7	1.6	264	382	220-240/1/50
30500122	ML60TB	1/4	5.7	CSIR	10.6	1.8	301	457	220-240/1/50
30500123	ML80TB	1/3	7.6	CSIR	12.8	2.4	392	634	220-240/1/50
30500124	ML90TB	3/8	8.5	CSIR	19.9	3.0	470	748	220-240/1/50
30500125	MPT12RA	1/2	12.1	CSIR	18.5	2.8	609	1145	220-240/1/50
30500126	MPT14RA	5/8	14.3	CSIR	21	3.4	746	1215	220-240/1/50
30500127	MX18TBa	3/4	18.4	CSIR	34.5	5	925	1513	220-240/1/50
30500128	MX21TBa	1	20.7	CSIR	37	5	1014	1696	220-240/1/50
30500129	MS26TB	1.2	25.9	CSIR	38.0	5.9	1133	2244	220-240/1/50
30500130	MS34TB	1.5	34.4	CSIR	41.0	7.8	1540	3002	220-240/1/50

*TEST CONDITIONS : EN 12900 (-10°C +45°C)

R404a

R507

CUBIGELL LBP

CODE	MODEL	HP	CC	EL. SCHEME	LRA	A	W	COOLING CAPACITY W*	V/Ph/Hz
30500131	ML45FB	1/6	4.6	CSIR	8.5	1.3	197	187	220-240/1/50
30500132	ML60FB	1/5	6.0	CSIR	8.6	1.3	213	255	220-240/1/50
30500133	ML80FB	1/4	8.1	CSIR	13	2.0	314	328	220-240/1/50
30500134	ML90FB	1/3	8.8	CSIR	13	2.2	328	394	220-240/1/50
30500135	MLY12LAa	3/8	10.7	CSIR	18.5	2.8	400	498	220-240/1/50
30500136	MPT12LA	3/8	12.1	CSR	13.9	2.1	442	591	220-240/1/50
30500138	MP14FB	1/2	14.1	CSIR	17.5	3.2	515	583	220-240/1/50
30500137	MPT14LA	1/2	14.3	CSR	16	2.6	521	679	220-240/1/50
30500139	MPT16LA	1/2	16.1	CSR	19	2.7	573	770	220-240/1/50
30500140	MX18FBa	5/8	18.4	CSR	18	2.8	600	769	220-240/1/50
30500141	MX21FBa	3/4	20.7	CSR	24	3.3	656	873	220-240/1/50
30500142	MX23FBa	1	23.2	CSR	30	3.7	736	981	220-240/1/50
30500143	MS26FB	1.2	25.9	CSR	31.5	4.2	828	1166	220-240/1/50
30500144	MS34FB	1.5	34.4	CSR	39.0	6.0	1052	1423	220-240/1/50

*TEST CONDITIONS: EN 12900 (-25°C +45°C)

R134a

EMBRACO HMBP



CODE	MODEL	HP	CC	EL. SCHEME	LRA	A	W	COOLING CAPACITY W*	V/Ph/Hz
30500065	EMT37HDP	1/10	3,40	RSIR	4.3	0.8	137	181	220-240/1/50
30500066	EMT45HDR	1/8	3.97	CSIR	5.0	1.1	170	184	220-240/1/50
30500067	EMT50HDP	1/6	4.50	RSIR	6.4	1.2	190	242	220-240/1/50
30500068	EMT6144Z	1/6	5.20	CSIR	8.5	1.4	222	294	220-240/1/50
30500069	EMT6160Z	1/5	6.76	CSIR	9.8	1.7	300	377	220-240/1/50
30500070	EMT6170Z	1/4L	7.69	CSIR	10.4	2.0	356	418	220-240/1/50
30500071	NEK6170Z	1/4	8.40	CSIR	12.4	2.1	347	422	220-240/1/50
30500072	NEK6187Z	1/3	10.00	CSIR	16.1	2.6	410	477	220-240/1/50
30500073	NEU6187Z	1/3	10.00	CSIR	13.0	2.3	411	560	220-240/1/50
30500074	NEU6210Z	3/8	12.12	CSIR	18.5	2.2	381	578	220-240/1/50
30500075	NEU6212Z	1/2L	14.30	CSIR	20.0	3.4	491	706	220-240/1/50
30500076	NEU6214Z	1/2	16.80	CSIR	22.0	3.2	569	836	220-240/1/50
30500007	NT6215Z	1/2	17.40	CSIR	21.0	3.9	638	796	200-240/1/50
30500077	NT6217Z	5/8	20.40	CSIR	25.0	4.7	773	938	220-240/1/50
30500078	NT6220Z	3/4	22.40	CSIR	28.0	5.2	862	1011	200-240/1/50
30500079	NJ6220Z	3/4	26.20	CSIR	35.0	5.7	978	1114	220-240/1/50
30500080	NJ6226Z	1	34.37	CSR	31.0	6.0	1232	1497	220-240/1/50

*TEST CONDITIONS: EN 12900 (-10°C +45°C)

R134a

EMBRACO HMBP



CODE	MODEL	HP	CC	EL. SCHEME	LRA	A	W	COOLING CAPACITY W*	V/Ph/Hz
30500058	EMY3109Z	1/10	3.97	RSIR	4.0	0.56	80	103	220-240/1/50
30500059	EMY3111Z	1/8	4.53	RSIR	5.0	0.67	92	126	220-240/1/50
30500060	EMY3115Z	1/6	6.09	RSIR	6.8	0.88	119	165	220-240/1/50
30500011	NEK2116Z	1/5	7.40	CSIR	10	0.61	134	194	220-240/1/50
30500061	NE2121Z	1/4	8.40	CSIR	12.6	1.68	204	251	220-240/1/50
30500062	NE2130Z	1/3	12.11	CSIR	13.2	2.07	260	346	220-240/1/50
30500063	NE2134Z	3/8	14.28	CSIR	18.5	2.3	292	364	220-240/1/50
30500064	NEK2140Z	1/2	16.8	CSIR	17	2.17	300	434	220-240/1/50

*TEST CONDITIONS: ASHRAE (-23.3°C +54.4°C)

R404a

R507

EMBRACO HMBP



CODE	MODEL	HP	CC	EL. SCHEME	LRA	A	W	COOLING CAPACITY W*	V/Ph/Hz
30500040	EMT6144GK	1/4	3,97	CSIR	7.7	1.25	215	378	220-240/1/50
30500041	EMT6152GK	1/4	4,50	CSIR	8.5	1.45	247	424	220-240/1/50
30500042	EMT6165GK	1/3L	5,19	CSIR	10.4	1.84	297	484	220-240/1/50
30500043	NEK6165GK	1/3L	6,20	CSIR	12.4	2.1	360	542	220-240/1/50
30500044	NEK6181GK	1/3	7,28	CSIR	12.0	2.5	398	599	220-240/1/50
30500045	NEU6210GK	3/8	7,28	CSIR	16.0	2.42	392	645	220-240/1/50
30500046	NEK6210GK	1/2	8.78	CSIR	10.1	2.81	470	724	220-240/1/50
30500047	NEU6212GK	1/2	8.78	CSIR	19.0	3.25	493	792	220-240/1/50
30500048	NEK6213GK	1/2	12,11	CSIR	19.3	4.01	673	972	220-240/1/50
30500049	NEU6214GK	1/2	10,0	CSIR	26	4,5	713	1001	220-240/1/50
30500050	NEU6215GK	5/8	12,11	CSR	22.0	3.76	685	1239	220-240/1/50
30500051	NEK6217GK	5/8	14,30	CSR	21.5	3.61	741	1166	220-240/1/50
30500052	NEU6220GK	5/8	14,50	CSR	29.5	4.0	784	1382	220-240/1/50
30500053	NT6222GK	3/4	17,40	CSR	37.0	4.58	884	1332	220-240/1/50
30500054	NT6224GK	1	20,44	CSR	29.0	4.88	1002	1573	220-240/1/50
30500014	NJ9226GK	1.1	21,70	CSR	27.5	4.24	974	1648	230/1/50
30500055	NJ9232GK	1.2	26,20	CSR	33.7	5.4	1145	1911	230/1/50
30500056	NJ9238GK	1.5	32,70	CSR	43.0	7.31	1570	2424	230/1/50
30500057	NJ9238GS	1.5	32,70	3 Ph	22.0	2.95	1374	2506	380-440/3/50-60

*TEST CONDITIONS: EN 12900 (-10°C +45°C)



Code	Model	Dimensions A x B x C mm	Cooling yield $\Delta T_1=15K$ Watt	Fan n° x n° x $\varnothing$ mm	Conveyor
17760	STFT 12118	185 x 184 x 30	470	1 x 170	CF18
17761	STFT 12218	185 x 184 x 60	745	1 x 170	CF18
17762	STFT 14121	215 x 214 x 30	665	1 x 200	CF21
17763	STFT 14221	215 x 214 x 60	1000	1 x 200	CF21
17764	STFT 16124	245 x 244 x 30	925	1 x 230	CF24
17765	STFT 16224	245 x 244 x 60	1385	1 x 230	CF24
17766	STFT 18127	275 x 274 x 30	1235	1 x 254	CF27
17767	STFT 18227	275 x 274 x 60	1935	1 x 254	CF27

Product: **Luve**

CODE	MODEL	FOR FAN $\varnothing$
17773	CF18	170
17774	CF21	200
17775	CF24	230
17776	CF27	254

Product: **Luve**



280

DEHYDRATOR FILTER CASTEL 4303/2

CASTEL TYPE 4303/2
INLET/OUTLET 1/4 IN
INTERNATIONAL CODE 032

Product: **Castel**



281

DEHYDRATOR FILTER CASTEL 4305/2

CASTEL TYPE 4305/2
INLET/OUTLET 1/4 IN
INTERNATIONAL CODE 052

Product: **Castel**



282

DEHYDRATOR FILTER CASTEL 4308/2

CASTEL TYPE 4308/2
INLET/OUTLET 1/4 IN
INTERNATIONAL CODE 082

Product: **Castel**



283

DEHYDRATOR FILTER CASTEL 4308/3

CASTEL TYPE 4308/3
INLET/OUTLET 3/8 IN
INTERNATIONAL CODE 083

Product: **Castel**



261

MOLECULAR FILTER 30 GRAMMS Ø6,2 X 2,2 MM.

WELDED PIPE Ø 6,2 MM.
WELDED PIPE Ø 2,2 MM.
TOTAL LENGHT 140 MM.
FOR ALL REFRIGERATED GASES
Product: **De.Na.**



262

MOLECULAR FILTER 30 GRAMMS Ø6,5 X 6,5 MM.

WELDED PIPE . Ø 6,5 MM.
WELDED PIPE . Ø 6,5 MM.
TOTAL LENGHT 140 MM.
PER FOR ALL REFRIGERATED GASES
Product: **De.Na.**

Refrigeration / Grids



4853

PLASTIC GRID GN 2/1 650x530 MM.

EXTERNAL DIMENSION 650 X 530 MM.
WITH POST LIFT SIDE 530 MM.



4880

**GRID 2/1 INOX 18/10 AISI 304
650x530 MM.**

EXTERNAL DIMENSION 650 X 530 MM.
WITH POST LIFT SIDE 530 MM.



7637

FRIDGE PLASTIC 600x400 MM.

EXTERNAL DIMENSION 600 X 400 MM.
WITHOUT POST LIFT SIDE GREY COLOR
2 TIES



4890

PLASTIC GRID GN 1/1 530x325 MM.

EXTERNAL DIMENSION 530 X 325 MM.
WITHOUT POST LIFT SIDE



4881

**GRID1/1 INOX 18/10 AISI 304
530x325 MM.**

EXTERNAL DIMENSION 530 X 325 MM.
WITHOUT POST LIFT SIDE

Refrigeration / Handles



40

UNIVERSAL HANDLE

EXTERNAL DIMENSION 275 X 28 MM.
DISTANCE BETWEEN FIXING HOLES 225 MM.

Product: **Intertecnica**



15302

COMPLETE HANDLE 251x19 MM.

EXTERNAL DIMENSION 251 X 19 MM.
DISTANCE BETWEEN FIXING HOLES 222 MM.

Product: **Germani**



52

COMPLETE HANDLE

COMPLETE WITH NOSE PAD FOR COLD ROOM

Product: **Intertecnica**



24

COMPLETE HANDLE WITH KEY

COMPLETE WITH NOSE PAD FOR COLD ROOM

Product: **Intertecnica**



2976

CHROMED COMPLETE HANDLE

DISTANCE BETWEEN FIXING HOLES 133 MM. EXTERNAL DIMENSION 258 X 30 MM.

WITH ADJUSTABLE NOSEPAD

Product: **Fermod**



51

CHROMED COMPLETE HANDLE

DISTANCE BETWEEN FIXING HOLES 112 MM. EXTERNAL DIMENSION 250 X 21 MM.

Product: **Germani**



49

CHROMED COMPLETE HANDLE 5240/3L

DISTANCE BETWEEN FIXING HOLES 105 MM.
EXTERNAL DIMENSION 210 X 28 MM.
WITH ADJUSTABLE NOSEPAD

Product: **Germani**



Code	Model	Type	Ø Fan	RPM Speed	Watt	Power supply
25080	YWF-4E-250	Aspirante	250	1380	50	230V. 50 Hz.
25081	YWF-4E-300	Aspirante	300	1380	75	230V. 50 Hz.
25082	YWF-4E-315	Aspirante	315	1300	105	230V. 50 Hz.
25083	YWF-4E-330	Aspirante	330	1300	110	230V. 50 Hz.
25084	YWF-4E-350	Aspirante	350	1380	140	230V. 50 Hz.
25085	YWF-4E-400	Aspirante	400	1380	180	230V. 50 Hz.

Product: **Weiguang**

Refrigeration / Pentavalent motor fan



15005

WEIGUANG MOTOR FAN YZF5-13 5W HIGH QUALITY

MODEL: WEIGUANG YZF5-13
PENTAVALENT FIXING POWER
SUPPLY 230V.
50/60HZ SHAFT 25 MM.
Product: **WEIGUANG**



5041

WEIGUANG MOTOR FAN YZF10-20 10W HIGH QUALITY

MODEL: WEIGUANG YZF10-20
PENTAVALENT FIXING POWER
SUPPLY 230V.
50/60HZ SHAFT 25 MM.
Product: **WEIGUANG**



5042

WEIGUANG MOTOR FAN YZF16-25 16W HIGH QUALITY

MODEL: WEIGUANG YZF16-25
PENTAVALENT FIXING POWER
SUPPLY 230V.
50/60HZ SHAFT 25 MM.
Product: **WEIGUANG**



5044

WEIGUANG MOTOR FAN YZF25-40 25W HIGH QUALITY

MODEL: WEIGUANG YZF125-40
PENTAVALENT FIXING POWER SUPPLY
230V. 50/60HZ SHAFT 25 MM.

Product: **WEIGUANG**



15000

PENTA MOTOR FAN 5W EMI 5-82-1305

MOD. EMI-EUROMOTORS 5-82-1305
PENTAVALENT FIXING POWER SUPPLY
230V. 50/60HZ SHAFT 15 MM.

Product: **EMI**



15001

PENTA MOTOR FAN 10W EMI 5-82-2010

MOD. EMI-EUROMOTORS 5-82-2010
PENTAVALENT FIXING POWER SUPPLY
230V. 50/60HZ SHAFT HIGH 15 MM.

Product: **EMI**



15002

PENTA MOTOR FAN 16W EMI 5-82-3016

MOD. EMI-EUROMOTORS 5-82-3016
PENTAVALENT FIXING POWER SUPPLY
230V. 50/60HZ. SHAFT 15 MM.

Product: **EMI**



15003

PENTA MOTOR FAN 25W EMI 5-82-4025

MOD. EMI-EUROMOTORS 5-82-4025
PENTAVALENT FIXING POWER SUPPLY
230V. 50/60HZ. SHAFT 15 MM.

Product: **EMI**



5045

PENTA FAN MOTOR 16W EMI 5-82-3016/7 SHAFT25 MM.

MOD. EMI-EUROMOTORS 5-82-3016/7
PENTAVALENT FIXING POWER SUPPLY
230V. 50/60HZ SHAFT LENGHT 25 MM.

Product: **EMI**

Refrigeration/ Tangential Motor Fan



5053

**TANGENTIAL MOTOR FAN
Ø 60x180 MM. SX**

FAN d. 60 X 180 MM. LEFT MOTOR
POWER SUPPLY 230V. 50HZ.
MAXIMUM TEMPERATURE 135°C.

Product: **Coprel**



5054

**TANGENTIAL MOTOR FAN
Ø 60x180 MM. DX**

FAN d. 60 X 180 MM. RIGHT MOTOR
POWER SUPPLY 230V. 50HZ.
MAXIMUM TEMPERATURE 135°C.

Product: **Coprel**



5057

**TANGENTIAL MOTOR FAN
Ø 60x270 MM. SX**

FAN Ø 60 X 270 MM. LEFT MOTOR
POWER SUPPLY 230V. 50HZ.
MAXIMUM TEMPERATURE 135°C.

Product: **Coprel**



5058

**TANGENTIAL MOTOR FAN
Ø 60x270 MM. DX**

FAN Ø 60 X 270 MM. RIGHT MOTOR
POWER SUPPLY 230V. 50HZ.
MAXIMUM TEMPERATURE 135°C.

Product: **Coprel**



25017

**TANGENTIAL MOTOR FAN
Ø 45x120 MM. DX**

FAN d. 45 X 120 MM. RIGHT MOTOR
POWER SUPPLY 230V. 50HZ.
MAXIMUM TEMPERATURE 40°C.

Product: **Coprel**



25018

**TANGENTIAL MOTOR FAN
Ø 45x180 MM. DX**

FAN d. 45 X 180 MM. RIGHT MOTOR
POWER SUPPLY 230V. 50HZ.
MAXIMUM TEMPERATURE 135°C.

Product: **Coprel**

Refrigeration / Digital Thermoregulator



13278

DIGITAL THERMOREGULATOR KIT 1 NTC 10A 230V.

TEMPERATURES SCALE -55 + 110 °C
CONF. NTC - FULL PROBE SUITABLE
FOR PTC PROBES - NTC1 RELE'
OUTPUT 10A ALIM. 230V. 50HZ. DIM.
FRONT COVER 78X37 DEPTH. 67 MM.
SUITABLE. ELIWELL ID961 / ID961 PLUS
Product: **Elitech**



13279

DIGITAL THERMOREGULATOR KIT 2 NTC 10A 230V.

TEMPERATURES SCALE -55 +150 °C
CONF. NTC - COMPLET WITH PROBE
SUITABLE FOR PROBE PTC - NTC 3 RELE'
OUTPUTS 10A SUPPLY 230V. 50HZ. DIM.
FRONT COVER 78X37 DEPTH. 67 MM.
SUITABLE. ELIWELL ID974 / ID974 PLUS.
Product: **Elitech**



13257

ELIWELL CONTROLLER ID 961 PLUS 230V

TEMPERATURES SCALE -55 +150°C SETS
FOR PROBE NTC CONFIGURABLE
PTC E PT1000
1 INT. DEFROSTING POING
1 RELE' OUTPUT 2HP - SUPPLY 230V.
DIM. 78X37 MM. DEPTH. 67 MM.
Product: **Eliwell**



13261

ELIWELL CONTROLLER ID 974 PLUS 230V

TEMPERATURES BOX -55 +150°C
SETS FOR PROBE NTC CONFIGURABLE
PTC E PT1000 PROBE INPUT: 2 + 1
OPTIONAL 3 RELE' OUTPUT 5A - 8A - 2HP
WITH BUZZER RINGER - ALIM. 230V.
DIM. 78X37 MM. DEPTH. 67 MM.

Product: **Eliwell**



3199

PROBE NTC ø 6x15 1500mm IP67

Product: **Eliwell**



13299

PROBE NTC d. 6x15 3000 MM.IP67

Product: **Eliwell**

Refrigeration / Thermostatic Vales



351

THERMOSTATIC VALVE TN2 - 068Z3542

DANFOSS MODEL TN2 - 068Z3542
(068Z3346) – GAS TYPE R134A
INLET 3/8" - OUTLET 1/2"
CAPILLAR LENGHT 1500 MM.
MAXIMUM PRESSURE 34 BAR.
Product: **Danfoss**

352

TERMOSTATIC VALVE TS2 - 068Z3508

DANFOSS MODEL TS2 - 068Z3508
GAS TYPE R404A/507
INLET 3/8" - OUTLET 1/2"
CAPILLAR LENGHT 1500 MM.
MAXIMUM PRESSURE 34 BAR.
Product: **Danfoss**

340

**ORIFICE DANFOSS
T2-TE2 MOD. 0X 068-2002**

HOLE Ø 0X

Product: **Danfoss**



341

**ORIFICE DANFOSS
T2-TE2 MOD. 00 068-2003**

HOLE Ø 0

Product: **Danfoss**

342

**ORIFICE DANFOSS
T2-TE2 MOD. 01 068-2010**

HOLE Ø 1


Product: **Danfoss**

343

**ORIFICE DANFOSS
T2-TE2 MOD. 02 068-2015**

HOLE Ø 2

Product: **Danfoss**

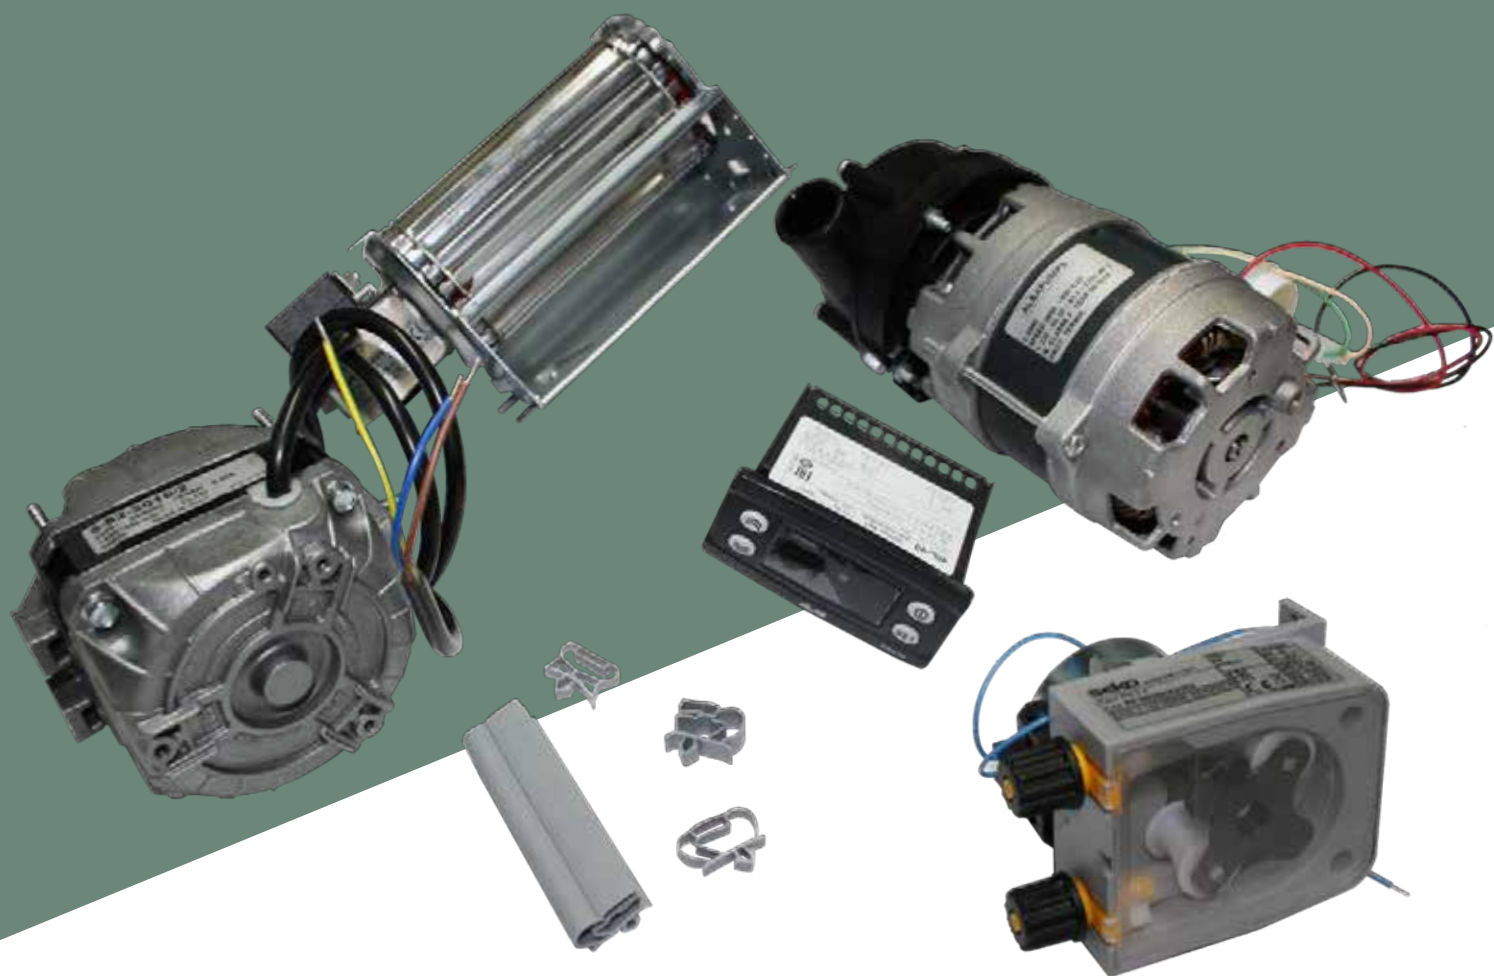

nuova

commerciale

83 E. Macrelli, Street
47521 Cesena (FC) Italy
Phone. +39 0547 612292
Fax. +39 0547 21771
www.smcommerciale.it
info@smcommerciale.it